


## Stirring Line







Stirring Line

Electronic Overhead stirrers

Velp Scientifica's stirrers are manufactured using advanced techniques that comply with international standards. High torque, microprocessor control, electronic safety circuitry, and slow start speed allow highly viscous liquids to be stirred in complete safety. Few models equipped with Digital display. Velp's stirrer include an innovative, hand-tight chuck with safety closure. Stirrers are available with 35 W, 60 W and 120 W motors. DLS, LH, and DLH models offer an automatic speed compensation for changing solution viscosity thus increasing the motor durability. Silent operation Safety Sturdy Microprocessor-controlled

Accurate design Limited weight Digital displays





#### HEATING PLATES

Safety Ceramic heating plate (REC), extremely fast to reach up to 540°C

Single position (RC) and two positions (RC2) with heating plate made by aluminum alloy coated with a protection for excellent chemical resistance



REC

#### **Heating Magnetic Stirrers**

The range of heating magnetic stirrers from a single to a multi-position version, are the best choice for simultaneously heating and stirring your reactions and samples. The Velp heating magnetic stirrers offers modern design with a range of plate sizes to suit your individual requirements.

Velp Models ARE, AREX and AREC family come with the highest safety standards available.

#### Models:

- Standard stirrer for every lab (ARE)
   Soft start stirring motor and connection to digital thermoregulator (AREX, AREC.X)
- Individually controlled multi-position (AM4)
   Timer regulation with automatic shut down
- Timer regulation with automatic shut down (T.ARE, AREC.T)
- Large heating plates and high stirring
- capacity (ARED)
- Bright digital display (AREC)
- Highest safety standard available



**ARE** 







#### **MULTI-POSITION MODEL**

C4 positions separately controlled Temperature range from room temperature to 370°C

**ARED** 






**AREX** 

900 W Heating power (ARED)
 Programmable timer function (T.ARE)
 Excellent stirring results with volumes up to 25 liters (H<sub>2</sub>O)

Heating plates

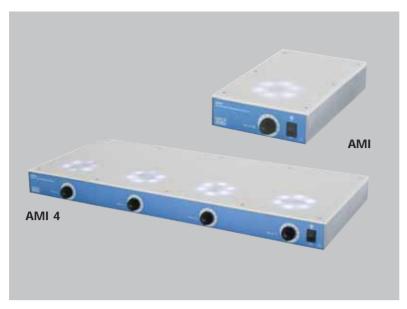


Lighted magnetic stirrers Available in single-position (AMI) or four positions (AMI4), the units have separate speed controls. Suitable for solutions that have weak colour changes during titration

#### Ultraflat magnetic stirrer

The ultraflat magnetic stirrer is motor-less: no moving mechanical components, no maintenance is required!







#### PCM MAGNET (PATENTED **COMPOSITE MAGNET)**

#### **Features and Benefits:**

Concentrates the energy of magnetic flux -Produces a strong attraction without vibrations





#### **Magnetic Stirrers**

-Small magnetic stirrers that stays cold after several days of working (MST, MICROSTIRRER)

-Multi-position magnetic stirrers with 6 and 15 positions (MULTISTIRRER 6, MULTISTIRRER 15) for a simultaneous stirring of the samples
-High performance magnetic stirrer for volumes up to 25 liters (ATE)

Magnetic stirrer suitable for common laboratory stirring requirements (AGE)







#### Vortex Evolution....looking at the future!

#### Vortex Wizard

The Vortex Wizard represents a radical technological innovation in the evolutionary process of Vortex mixers. Its optic technology provides an innovative operational mode that is absolutely unique on the market. In fact, the infrared system (IR) detects the presence of the test tube and automatically activates vibration

Provided with a dual operating mode, the possibility of changing the frequency of vibration is offered:

- SENSOR an infrared system (IR) automatically activates vibration so the laboratory technician does not have to apply any pressure!
- CONTINUOUS continuous operating mode combined with a large number of accessories. Vortex Wizard comes complete with a standard cup for single test tube.

### **WIZARD & CLASSIC** Features and Benefits:

- Enhanced bench top stability resulted from a low profile design
- Wide range of accessories for various applications
- Microprocessor control of ramping speed (from 50 to 3000 rpm)
- Water and chemical resistant key-pad
- Can be used in incubators and cold rooms
- Orbital diameter 4,5 mm

#### **Vortex Classic**

It is equipped with two operation modes, with the possibility to change the vibration frequency:

- TOUCH the automatic "Touch" mode starts the shaking with a light amount of pressure applied by the test tube on the cupping glass.
- CONTINUOUS continuous operation mode that, when combined with the use of a wide range of accessories (optional), make the instrument suited to a large variety of needs.



(TOUCH - PLATFORM) Classic also has a special lever that, when properly positioned, ensures maximum stability of the instrument depending on the operation mode selected.









Accessories

A0000016

A0000017

A0000019

A0000014

A0000012

A0000013

A0000015

# Homogenizer

#### Velp Solution for general purposes!



**CLASSIC** 

A00001047

#### Vortex Mixers

Two versions of vortex mixers are available:

ZX3 - Variable speed control with continuous and manual modes

RX3 - Constant vibration speed with manual mode

#### OV5

Homogenizer is the right solution for dispersing, homogenizing and mixing biological tissue samples (cells, animal, and vegetal tissues), pharmaceutical products, cosmetics and food products.

OV<sub>5</sub>

	NO 230V		lo 115V		>	mdı	°C max	g plate Ø	g capaciny	g L	sions mm	Sories
	50 Hz	60 Hz	Code No	Hz 60 Hz	Power	Speed rpm	Temp.	Heating	Stilring	Weight kg	Dimensions	Accessories
ARE	F20520162	F20530162		F20540162	630	10-1200	370			2,9	165x115x280	5,7,11,12,13,14
AREX	F20500163		_	F20540163	650	10-1300	370	155	20	2,9	165x115x280	5,712,13,14,35,36
ARED	F20520169	F20530169	_	F20540169	900	10-1200	370			3,1	190x110x245	5,7,11,12,13,14
T. ARE	F20520170	F20530170	_	F20540170	900	10-1200	370			3,1	190x110x245	5,7,11,12,13,14
AM4	F20520166	F20530166		_	2550	10-1200	370	155	5 (x4)	8,3	715x115x220	5,7,11,12,13,14
AREC	F2050	00010		F20510010	800	10-1300	540	200x200	15	3,9	205x96x335	5,7,8,11,12,13,14
AREC.X	F20500060			F20510060	800	10-1300	540	200x200	15	3,9	205x96x335	5,7,8,12,13,14,35,36
AREC.T	F20500050			F202510050	900	10-1300	540	200x200	15	3,9	205x96x335	5,7,8,11,12,13,14
VTF	F208B0063*			_					_	0.3	75x145x120	9,10,26,27
ESP	F206A0179			F206A0179	5	50-1100		_	5	0,9	160x33x230	8,37,38,39
MST	F203A0160			F203A0160	0,6	10-1100	_	_	5	0,4	130x50x150	5,6,37,38,39
Microstirrer	F203A0161			F203A0161	0,6	10-1100	_	_	5	0,55	120x48x128	5,6,37,38,39
AGE	F20320164	F20330164	_	F20340164	40	10-1200	_	_	8	1,8	171x75x190	5,6
ATE	F20300165			F20310165	1,5	10-1100	_		25	3,7	250x120x285	5,7
Multistirrer 6	F203A0177			F203A0177	3,6	50-850	_	_	0,4 (x6)	1,75	230x51x370	4,5,6,37,38,39
Multistirrer 15	F203A0178			F203A0178	9	50-850	_	_	0,25 (x15)	2,1	230x51x370	4,5,6,37,38,39
AMI	F204A0167			F204A0167	1.2	10-1100			5	1.2	150x55x270	5,6
AMI4	F204A0168			F204A0168	4.8	10-1100	_	_	5 (x4)	4	600x55x270	5,6
ES	F20100152			F20110152	35	50-1300			15	1,7	80x160x200	15,16,17,18,19,20,21,22,23,24,25
BS	F20100151			F20110151	60	50-2000	_	_	25	2,8	80x215x196	15,16,17,18,19,20,21,22,23,24,25
DLS	F20100155			F20110155	60	50-2000			25	3	80x215x196	15,16,17,18,19,20,21,22,23,24,25
LH	F20100156			F20110156	120	50-2000			40	3,4	80x230x196	15,16,17,18,19,20,21,22,23,24,25
DLH	F2010	F20100157		F20110157	120	50-2000	_	_	40	3,5	80x230x196	15,16,17,18,19,20,21,22,23,24,25
PW	F20100150			F20110150	120	20-1200		_	70	3,4	80x230x196	15,16,17,18,19,20,21,22,23,24,25
RC	F2070	0174		F20710174	600		370	155	_	1,7	165x115x280	12,13,14
RC2	F2070	0172		F20710172	1200	_	370	155	_	3,3	340x90x190	12,13,14
REC	F2070	0800		F20710080	800	_	540	200x200	_	3,15	205x96x335	12,13,14
RX3	F20220171	F20230171		F20240171	45	2400	_		_	2	150x134x150	3
ZX3	F20220176	F20230176	_	F20240176	45	50-2400	_	_	_	2	150x134x150	1,2,3
CLASSIC	F202A0173			F202A0173	30	0-3000		_	_	2,4	180x70x220	28,29,30,31,32,33,34,37,38,39
WIZARD	F202A0175			F202A0175	30	0-3000	_		_	2,4	180x70x220	28,29,30,31,32,34,37,38,39
OV5	R20900010	_			500	10000-30000	)	_	8	1,3	70x225x70	40,41,42,43
* Voltage 12V cc												





Explore Velp world www.velp.com

Number	Description	Code No	Number	Description	Code No
1	Stand for microtiter	A00001047	23	Stirring shaft with turbine	A00001309
2	Stand for 25 microvials 1,5 ml-Eppendorf type	A00001048	24	Stirring shaft with turbo propeller	A00001310
3	Supporting plate Ø 90 mm	A00001050	25	Stirring shaft with anchor	A00001311
4	Thermostatic bath for samples, 408x240x85 mm	A00001055	26	Clamp for the probe	A0000004
5	Magnetic stir bar, 6x35 mm	A00001056	27	Glass probe	A00000003
6	Magnetic stir bar, 6x20 mm	A00001057	28	Foam stand for 19 vials 1.5 ml-eppendorf ®	A00000012
7	Magnetic stir bar, 9,5x60 mm	A00001061	29	Customizable soft foam top	A00000013
8	Magnetic stir bar, 10x40 mm	A00001060	30	Foam stand 5 test tubes Ø 16 mm	A00000014
9	Derivation element PW10	A0000001	31	Foam stand for microtiter	A00000015
10	Probe extension cable, lenght 1 m	A00000002	32	Small rubber supporting plate Ø 50 mm	A00000016
11	Support rod	A00001069	33	Big foam supporting plate Ø 94 mm	A00000017
12	Hemispheric bowl for 250 ml flasks	A00001071	34	Foam stand for n° 4 test-tubes Ø 29 mm	A00000019
13	Hemispheric bowl for 500 ml flasks	A00001072	35	Spiral electric cable complete of plug	40000781
14	Hemispheric bowl for 1000 ml flasks	A00001073	36	Digital thermoregulator Vertex type VTF	F208B0063
15	Support rod and base	A00001300	37	USA plug for power supply 40001099	10003083
16	Double clamp	A00001301	38	UK plug for power supply 40001099	10003084
17	Ribbon clamp	A00001302	39	AU plug for power supply 40001099	10003085
18	Stirring shaft with floating blade	A00001304	40	H-stand with strap clamp, bosshead clamp	A00000045
19	Stirring shaft with folding blade	A00001305	41	Support rod and base	A00001300
20	Stirring shaft with fixed blade	A00001306	42	Double clamp	A00001301
21	Stirring shaft with propeller	A00001307	43	Strap clamp	A00000044
22	Stirring shaft with paddle, 6 holes	A00001308			

Your authorized agent:

We reserve the right to make technical alternations We do not assume liability for errors in printing, typing or transmission









VELP Scientifica srl Via Stazione 16 20040 Usmate (Milano) Italy Tel +39 039 628811 Fax +39 039 6288120 inse@velp.it www.velp.com

Constant Commitment to Knowledge Development